



www.raloe.com  
 TLF. +34 961 345 379  
 export@raloe.com



CUSTOMER	REF.
INSTALLATION ADDRESS :	
INSTALLATION LOCATION (required):	
DATE	PHONE NUMBER

## DATA SHEET STAIRLIFT

Units: \_\_\_\_\_ Travel: \_\_\_\_\_ mm (máx. 3000 mm)  
 Headroom: \_\_\_\_\_ mm Pit: \_\_\_\_\_ mm  
 Shaft: Width \_\_\_\_\_ mm Depth \_\_\_\_\_ mm  
 Car: Width \_\_\_\_\_ mm (standard 950 mm)  
 Depth \_\_\_\_\_ mm (standard 1250 mm)  
 Supply  Singlephase 230 V  Triphasic 230 V  Triphasic 400 V

### MECHANICAL INSTALLATIONS AND ENTRANCES

Mark position of the second entrance and its mechanical components.

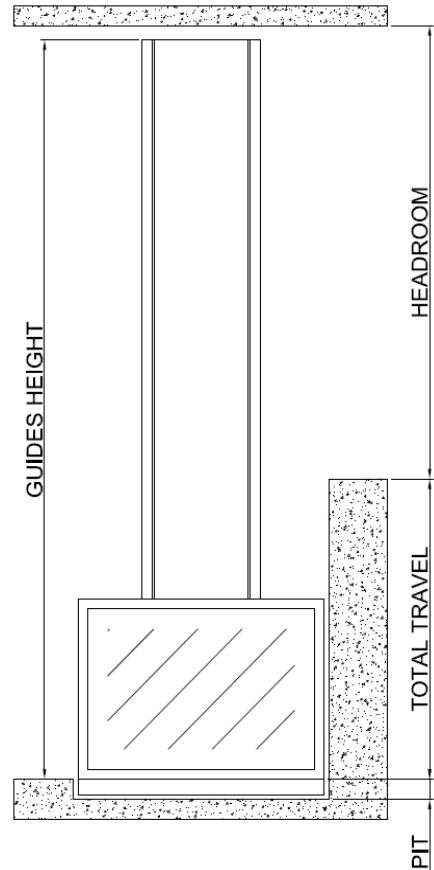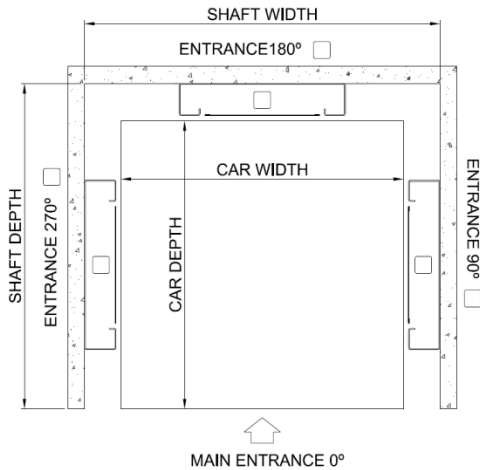

### FINISHES

Finishes car: Walls \_\_\_\_\_

Car Door: \_\_\_\_\_

Landing Door: \_\_\_\_\_

Color Profiles  RAL 7035 (Ligth Grey) + RAL 9005 (Black)

OPTIONS:  Acces Ramp Entrance 0°  Weatherproof

Floor \_\_\_\_\_

Opening \_\_\_\_\_

Opening \_\_\_\_\_

Other RAL: \_\_\_\_\_

Complet cabinet (600x260x800 mm)

### STANDARD FEATURES

Maximal load 300 kg  
 Average Car Height 1200 mm

Emergency Rescue  
 Safety Gear

Automatic Leveling  
 Speed: 0,10 m/s (2 STOPS)

### OBSERVATIONS

Minimum delivery time: 6 WEEKS on from confirmation date.

WEEK OF DELIVERY:

CONFIRMATION CLIENT: