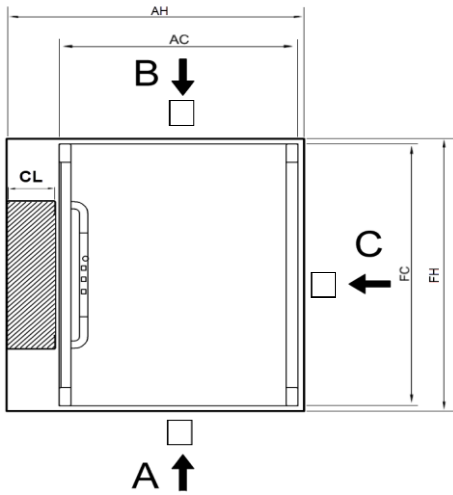



Headroom: _____ mm
 Travel: _____ mm (1:1 if $R \leq 3000$; 2:1 if $3000 < R \leq 10.000$)
 Shaft pit: _____ mm (without bellows: min. 100 mm - max. 150 mm; with bellows 170 mm)
 Shaft:
 Width (A) _____ mm (1150 standard) Depth(FH): _____ mm (1350 standard)
 Car:
 Width (AC): _____ mm (900 standard) Depth (FC): _____ mm (1300 standard)
 Tension: Monophasic 230 V

MECHANICAL INSTALLATIONS AND ENTRANCES:

ACCESS:

- Floor 0: _____
 Floor 1: _____
 Floor 2: _____
 Floor 3: _____

COLUMN DEPTH (CL):

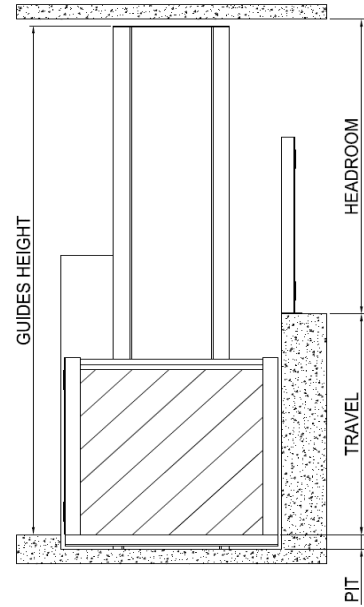- 220 mm (standard)
 190 mm (special)

CLOSED SHAFT: _____

DOORS
 CAR DOOR:

 PL: _____ mm HL: _____ mm Hand _____ Finishes: Full glass

LANDING DOOR:

- Floor 0: PL: _____ mm HL: _____ mm Hand _____ Finishes: Standard vision Big vision Full glass
 Floor 1: PL: _____ mm HL: _____ mm Hand _____ Finishes: Standard vision Big vision Full glass
 Floor 2: PL: _____ mm HL: _____ mm Hand _____ Finishes: Standard vision Big vision Full glass

CAR

Car finishes: _____ Walls: Crystal clear Floor: Lagrimate aluminum
 Profiles colour: RAL 9010 + 9006 Another RAL: _____ *Define RAL
 Complete outdoor Outdoor Indoor Stainless steel

OPTIONS

- Machinery Directive Photocells in cabin Bellows
 EN81.41 Phone in cabin Control cabinet in column (198 x 311,5 x 1831,5 mm)
 Lintel with lighting Access ramp 0° Outdoor control cabinet (800 x 412 x 1714 mm)
 Photocells in handrails Automatic door Control cabinet type MS-K (630 x 1500 x 300 mm)
 Fixed side cover

SHIPPING

- Trailer without unloading means Small truck with unloading means
 Client's warehouse Installation adress

STANDARD FEATURES

Maximum load 385 kg Emergency rescue Automatic re-leveling
 Average car height 1200 mm Safety valve Speed = 0,15 m/s (VF)

REMARKS

Minimum delivery time: 6 WEEKS from confirmation date

Budget validity: 30 days